


KILREMSSKIVOR FÖR KONISK KLÄMBUSSNING

V-BELT PULLEYS FOR TAPER BUSH

Profil Z/SPZ/3V Profile Z/SPZ/3V

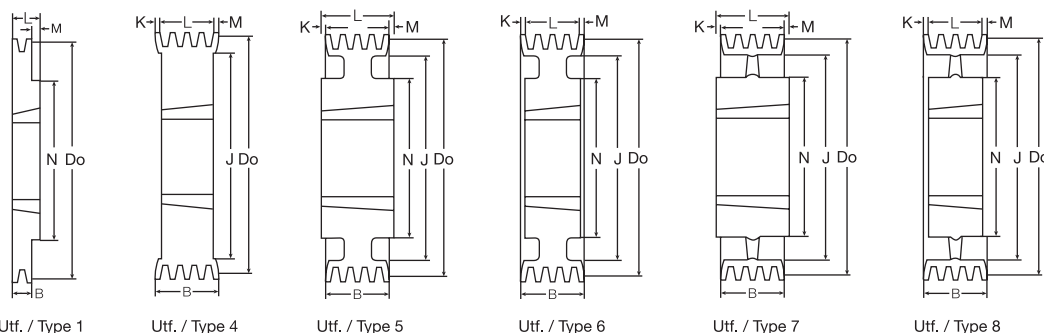

Utf. / Type 1

Utf. / Type 4

Utf. / Type 5

Utf. / Type 6

Utf. / Type 7

Utf. / Type 8

Do	Ant. spår Grooves	Buss. Nr. Bush No.	Best. Nr. Code	Max A-hål Max bore	Typ Type	B	J	K	L	M	N	Vikt Weight
190	1	1610	1SPZ190	42	1	16	-	-	25	9.0	92	1.8
	2	2012	2SPZ190	50	1	28	-	-	32	4.0	112	2.6
	3	2012	3SPZ190	50	6	40	161	-	32	8.0	112	4.9
	4	2517	4SPZ190	65	6	52	161	-	45	7.0	124	5.3
	5	2517	5SPZ190	65	6	64	161	-	45	19.0	124	6.3
	6	2517	6SPZ190	65	6	76	161	-	45	31.0	124	6.9
	8	3020	8SPZ190	75	4	100	161	24.5	51	24.5	-	8.2
200	1	2012	1SPZ200	50	1	16	-	-	32	16.0	112	2.3
	2	2012	2SPZ200	50	1	28	-	-	32	4.0	112	2.8
	3	2012	3SPZ200	50	6	40	171	-	32	8.0	112	3.5
	4	2517	4SPZ200	65	6	52	171	3.5	45	3.5	124	4.7
	5	2517	5SPZ200	65	6	64	171	9.5	45	9.5	124	5.5
	6	2517	6SPZ200	65	6	76	171	15.5	45	15.5	124	6.1
	8	3020	8SPZ200	75	4	100	171	24.5	51	24.5	-	9.3
224	1	2012	1SPZ224	50	5	16	195	8	32	8.0	112	2.5
	2	2012	2SPZ224	50	5	28	195	2	32	2.0	112	3.2
	3	2012	3SPZ224	50	6	40	195	4	32	4.0	112	3.9
	4	2517	4SPZ224	65	6	52	195	3.5	45	3.5	124	5.2
	5	2517	5SPZ224	65	6	64	195	9.5	45	9.5	124	6.0
	6	2517	6SPZ224	65	6	76	195	15.5	45	15.5	124	6.6
	8	3020	8SPZ224	75	4	100	195	24.5	51	24.5	-	11.8
250	1	2012	1SPZ250	50	7	16	221	8	32	8.0	112	2.8
	2	2012	2SPZ250	50	7	28	221	2	32	2.0	112	3.5
	3	2012	3SPZ250	50	8	40	221	4	32	4.0	112	4.3
	4	2517	4SPZ250	65	8	52	221	3.5	45	3.5	124	5.7
	5	2517	5SPZ250	65	8	64	221	9.5	45	9.5	124	6.4
	6	2517	6SPZ250	65	8	76	221	15.5	45	15.5	124	7.0
	8	3020	8SPZ250	75	8	100	221	24.5	51	24.5	145	10.5
280	1	2012	1SPZ280	50	7	16	251	8.0	32	8.0	112	2.9
	2	2012	2SPZ280	50	7	28	251	2.0	32	2.0	112	4.0
	3	2517	3SPZ280	65	7	40	251	2.5	45	2.5	124	5.3
	4	2517	4SPZ280	65	8	52	251	3.5	45	3.5	124	6.4
	5	2517	5SPZ280	65	8	64	251	9.5	45	9.5	124	7.1
	6	2517	6SPZ280	65	8	76	251	15.5	45	15.5	124	7.8
	8	3020	8SPZ280	75	8	100	251	24.5	51	24.5	145	10.8
315	1	2012	1SPZ315	50	7	16	286	8.0	32	8.0	112	3.1
	2	2012	2SPZ315	50	7	28	286	2.0	32	2.0	112	4.2
	3	2517	3SPZ315	65	7	40	286	2.5	45	2.5	124	6.1
	4	2517	4SPZ315	65	8	52	286	3.5	45	3.5	124	7.6
	5	2517	5SPZ315	65	8	64	286	9.5	45	9.5	124	8.6
	6	2517	6SPZ315	65	8	76	286	15.5	45	15.5	124	9.3
	8	3020	8SPZ315	75	8	100	286	24.5	51	24.5	145	12.9
355	1	2012	1SPZ355	50	7	16	326	8.0	32	8.0	112	3.5
	2	2012	2SPZ355	50	7	28	326	2.0	32	2.0	112	5.1
	3	2517	3SPZ355	65	7	40	326	2.5	45	2.5	124	7.3
	4	2517	4SPZ355	65	8	52	326	3.5	45	3.5	124	8.9
	5	2517	5SPZ355	65	8	64	326	9.5	45	9.5	124	10.0
	6	2517	6SPZ355	65	8	76	326	15.5	45	15.5	124	10.7
	8	3030	8SPZ355	75	8	100	326	12.0	76	12.0	145	16.0

Do	Ant. spår Grooves	Buss. Nr. Bush No.	Best. Nr. Code	Max A-hål Max bore	Typ Type	B	J	K	L	M	N	Vikt Weight
400	1	2012	1SPZ400	50	7	16	371	8.0	32	8.0	112	6.0
	2	2517	2SPZ400	65	7	28	371	8.5	45	8.5	124	6.3
	3	2517	3SPZ400	65	7	40	371	2.5	45	2.5	124	8.0
	4	2517	4SPZ400	65	8	52	371	3.5	45	3.5	124	10.1
	5	3020	5SPZ400	75	8	64	371	6.5	51	6.5	145	11.7
	6	3020	6SPZ400	75	8	76	371	12.5	51	12.5	145	14.5
	8	3030	8SPZ400	75	8	100	371	12.0	76	12.0	145	18.2
450	1	2517	1SPZ450	65	7	16	424	14.5	45	14.5	120	6.1
	2	2517	2SPZ450	65	7	28	424	8.5	45	8.5	120	8.2
	3	2517	3SPZ450	65	7	40	424	2.5	45	2.5	120	9.8
	4	3020	4SPZ450	75	8	52	424	0.5	51	0.5	145	11.8
	5	3020	5SPZ450	75	8	64	424	6.5	51	6.5	145	13.9
	6	3030	6SPZ450	75	8	76	424	-	76	-	145	16.9
	8	3535	8SPZ450	90	8	100	424	5.5	89	5.5	178	24.0
500	1	2517	1SPZ500	65	7	16	471	14.5	45	14.5	124	6.7
	2	2517	2SPZ500	65	7	28	471	8.5	45	8.5	124	9.1
	3	2517	3SPZ500	65	7	40	471	2.5	45	2.5	124	11.4
	4	3020	4SPZ500	75	8	52	471	0.5	51	0.5	159	14.3
	5	3020	5SPZ500	75	8	64	471	6.5	51	6.5	145	17.6
	6	3020	6SPZ500	75	8	76	471	12.5	51	12.5	145	19.9
	8	3535	8SPZ500	90	8	100	471	5.5	89	5.5	178	26.0
630	2	2517	2SPZ630	65	7	28	601	8.5	45	8.5	124	11.7
	3	2517	3SPZ630	65	7	40	601	2.5	45	2.5	124	15.9
	4	3020	4SPZ630	75	8	52	601	0.5	51	0.5	145	20.0
	5	3020	5SPZ630	75	8	64	601	6.5	51	6.5	145	22.7
	6	3535	6SPZ630	90	7	76	601	6.5	89	6.5	178	33.6
	8	3535	8SPZ630	90	8	100	601	5.5	89	5.5	178	35.8